

## Basic properties

**730 g/m<sup>2</sup>**

Total weight (DIN ISO 2286/2 1998)

*Totaal gewicht - Poids total -*

*Gesamtgewicht - Peso total*

## Polyester + PVC

### Composition

*Samenstelling - Composition -*

*Zusammensetzung - Composición*

Fabric (DIN ISO 2075 • DIN ISO 2060)

*Weefsel - Tissu - Gewebe - Tejido*

Warp: Polyester, 1100 dtex

Weft: Polyester, 1100 dtex

## Lacquering

*Lak - Laquage - Lackierung - Lacado*

Top: glossy

Bottom: glossy


## Aspect embossing

*Aspect embossing - Aspect embossing -*

*Prägung - Tipo acabado*

Glossy

# SIOEN

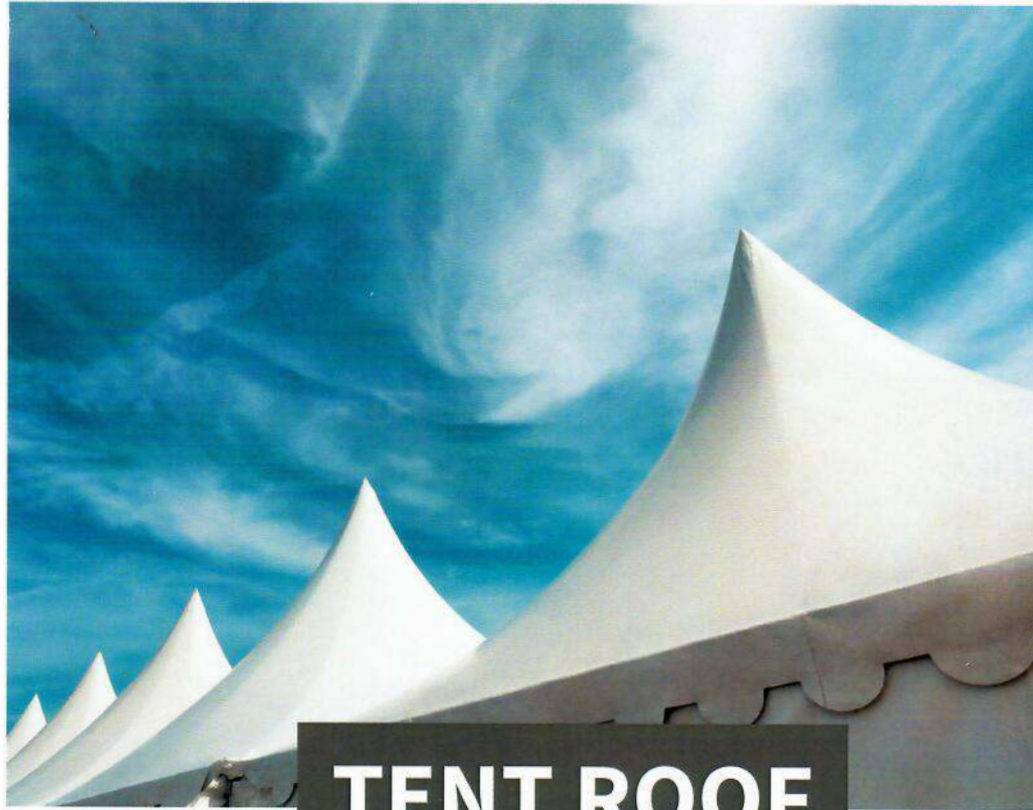

## TENT ROOF

B9115

Extreme cold resistant

Flame retardant

Available in different colours




Extreme  
temperature



Flame retardant



Antibacterial



UV treated

## Basic properties

**730 g/m<sup>2</sup>**

Total weight (DIN ISO 2286/2 1998)

Totaal gewicht - Poids total -

Gesamtgewicht - Peso total

## Polyester + PVC

Composition

Samenstelling - Composition -

Zusammensetzung - Composición

Fabric (DIN ISO 2075 • DIN ISO 2060)

Weefsel - Tissu - Gewebe - Tejido

Warp: Polyester, 1100 dtex

Weft: Polyester, 1100 dtex

## Lacquering

Lak - Laquage - Lackierung - Lacado

Top: glossy

Bottom: glossy

## Aspect embossing

Aspect embossing - Aspect embossing -

Prägung - Tipo acabado

Glossy

## Sample

---

## Colours

5102 - Blue



Available width:  
250 cm - Standard

6103 - Green




Available width:  
250 cm - Standard

7001 - Grey



Available width:  
250 cm - Standard

7999 - Black



Available width:  
250 cm - Standard

Other colours are available on special production. - Specifieke kleuren mogelijk op aanvraag. - Autres coloris possibles sur fabrications spéciales. - Andere Farbe mit Sonderproduktion möglich. - Otros colores disponibles bajo pedido mínimo.

## Technical specifications

<i>Breaking strength Warp (EN ISO 1421/1 1998)</i> <i>Treksterkte Ketting - Résistance rupture Chaîne -</i> <i>Höchstzugkraft Kette - Resistencia ruptura urdimbre</i>	<b>3000 N/5cm</b>
<i>Breaking strength Weft (EN ISO 1421/1 1998)</i> <i>Treksterkte Inslag - Résistance rupture Trame -</i> <i>Höchstzugkraft Schuss - Resistencia ruptura trama</i>	<b>2800 N/5cm</b>
<i>Tear strength Warp (DIN 53363 2003)</i> <i>Scheurweerstand Ketting - Résistance à la déchirure</i> <i>Chaîne - Weiterreisskraft Kette - Resistencia desgarro</i> <i>urdimbre</i>	<b>300 N</b>
<i>Tear strength Weft (DIN 53363 2003) Scheurweerstand</i> <i>Inslag - Résistance à la déchirure Trame -</i> <i>Weiterreisskraft Schuss - Resistencia desgarro trama</i>	<b>300 N</b>
<i>Adhesion (EN ISO 2411 2000) Hechting - Adhérence -</i> <i>Haftung - Adhesión</i>	<b>100 N/5cm</b>
<i>Temperature resistance (DIN EN 1876/2 1998)</i> <i>Temperatuursbestendigheid - Tenue à la température</i> <i>- Temperatuursbeständigkeit - Resistencia térmica</i>	<b>-54/+70 °C</b>
<i>Light fastness (Except white and (half-)transparent)</i> <i>(ISO 105 B02 2014) Lichtechtheid (Uitgezonderd wit</i> <i>en (half-)transparent) - Tenue à la lumière (Excepté</i> <i>en blanc et (semi-)transparent) - Lichtechtheit</i> <i>(Ausnahme weiss und (semi-)transparent) - Solidez</i> <i>color ( exceptuando blanco y semi-transparente)</i>	<b>7-8</b>
<i>Fire behaviour (DIN 4102 1998) Brandgedrag -</i> <i>Réaction au feu - Brennverhalten - Resistencia al</i> <i>fuego</i>	<b>B1</b>
<i>Fire behaviour (NF P 92 507 2004) Brandgedrag -</i> <i>Reaction au feu - Brennverhalten - Resistencia al</i> <i>fuego</i>	<b>M2</b>
<i>Reaction to fire (EN 13501-1 + A1 2009) Reactie bij</i> <i>brand - Reaction au feu - Brennverhalten - Reacción</i> <i>al fuego</i>	<b>B-s2,d0</b>

9909 - White

Available width:  
250 cm - Standard  
300 cm - Standard





Produced  
in Europe



# Sioen technical textiles

Discover our extensive portfolio at [sioentechnicaltextiles.com](http://sioentechnicaltextiles.com)

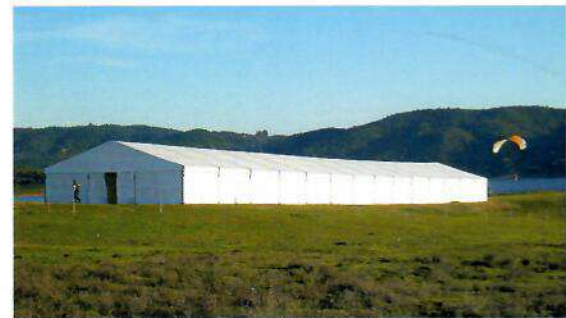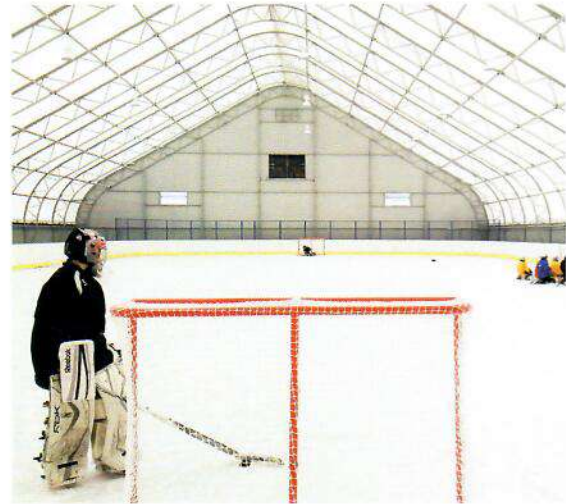

## Karakteristieken

**NL** Resistent tegen extreme koude  
/ Vlamvertragend / Beschikbaar in  
verschillende kleuren

## Caractéristiques

**FR** Résistant aux températures extrêmement  
basses / Ignifuge / Disponible en plusieurs  
couleurs

## Eigenschaften

**DE** Extrem Kältebeständig /  
Flammhemmend / In verschiedenen Farben  
erhältlich

## Características

**ES** Resistente a temperaturas bajas /  
ignifugo / Disponible en diferentes colores



**SIOEN**

ТД "Технический Текстиль" +7  
(499) 288 77 10 / [www.ttex.ru](http://www.ttex.ru)

Textile Solution Provider - Go to [www.sioentechnicaltextiles.com](http://www.sioentechnicaltextiles.com) for more information.  
Fabriekstraat 23 - 8850 Ardooie - Belgium - +32 (0) 51 740 900 - [info@sioen.com](mailto:info@sioen.com) - [www.sioen.com](http://www.sioen.com)